


imageRUNNER 2200G/2800G/3300G

The imageRUNNER 2200G/2800G/3300G New Generation Digital- Multifunction Workgroup Solutions.

The new imageRUNNER 2200G, imageRUNNER 2800G, and imageRUNNER 3300G are built upon Canon's newly developed, network-oriented architecture, called imagePlatform. These models offer unsurpassed performance in stand-alone or networked document management environments.

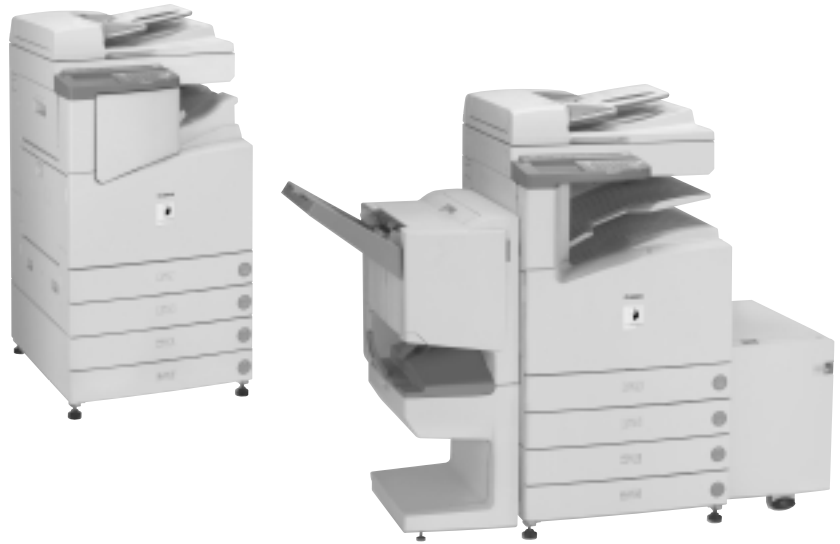

(Both shown w/optional accessories)

Standard features include:


- 5.1GB Hard Disk and 128MB RAM
Advantage: The Image Server memory provides unique functionality and information management including scan-once-print-many, job build, copy reservation, and confidential mailboxes.
- 2200G: 22cpm/ppm and 75,000 impressions per month duty cycle
2800G: 28cpm/ppm and 100,000 impressions per month duty cycle
3300G: 33cpm/ppm and 120,000 impressions per month duty cycle
Advantage: Increased Productivity.
- Integrated Paper Output
Advantage: The optional Finisher-J1 is built into the machine instead of being attached on the side, giving the machine a very small footprint.
- Extensive Finishing Capabilities including multi-position stapling, 2-and-3-hole punching, saddle-stitch stapling, and V-folding
Advantage: Designed to enhance productivity and facilitate the delivery of the most professional looking documents.

Available as options:

- Super G3 Fax Board-J1 - allows the imageRUNNER 2200G/2800G/3300G to provide fax capabilities far more capable than most stand-alone fax machines.
- Network Multi-PDL Printer Kit-C1 - provides network scanning and printing capabilities through any TWAIN-compliant software application.
- eCopy ScanStation - allows users to scan paper documents and distribute them over the Internet or corporate intranets.



imageRUNNER 2200G/2800G/3300G CONFIGURATION CHART

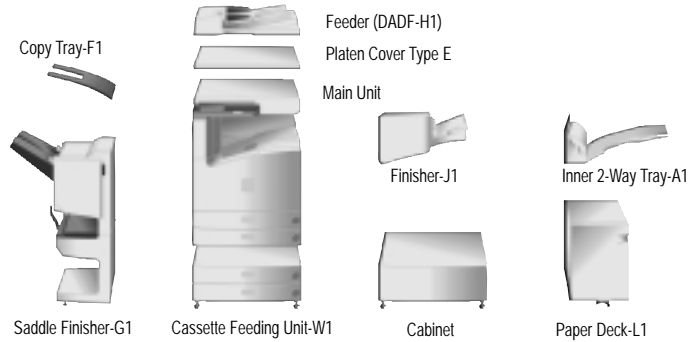

imageRUNNER 2200G/2800G/3300G Specifications

Main Unit

<i>Type:</i>	Digital, Multifunction Imaging System
<i>Imaging System:</i>	Laser Dry Electrostatic Transfer
<i>Developing System:</i>	Dry Monocomponent Toner Projection
<i>Fixing System:</i>	RAPID Fusing System
<i>Image Server Memory:</i>	Standard 128MB RAM + 5.1GB HDD (Max. Capacity: Approx. 4,000 originals)
<i>First-copy Time:</i>	5.8 seconds from platen glass 6.6 seconds from ADF
<i>Warm-Up Time:</i>	10 Seconds or Less From Sleep Mode 29 Seconds from Main Power Off
<i>Copy/Printing Speed:</i>	22/28/33 ppm (Letter)
<i>Max. Mail Boxes Supported:</i>	100
<i>Max. Copy Reservation:</i>	5 jobs
<i>Actual Resolution:</i>	600 dpi x 600 dpi
<i>Interpolated Resolution:</i>	1200 dpi x 600 dpi (Copy) 2400 dpi x 600 dpi (Print)
<i>Halftone:</i>	256 Gradations of Gray
<i>Duplexing:</i>	Standard Automatic Trayless Duplexing
<i>Magnification Reduction/Enlargement:</i>	25% to 800% (in 1% increments)
<i>Paper Supply</i>	
<i>Standard:</i>	Dual 500-sheet Paper Cassettes (1,000 sheets) Stack Bypass (50 Sheets)
<i>Optional:</i>	Dual 500-sheet Paper Cassettes (1,000 Sheets) Paper Deck (2,500 Sheets)
<i>Exposure Control:</i>	Automatic or Manual
<i>Multiple Copies:</i>	1 to 999
<i>Max. Original Size:</i>	11" x 17" (Ledger)
<i>Paper Weights:</i>	17 lb. to 20 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Stack Bypass)
<i>Power Source:</i>	120V AC, 60Hz, 15A
<i>Drum:</i>	OPC - Estimated Yield: 55,000 impressions
<i>Max. Duty Cycle:</i>	imageRUNNER 2200 - 75,000, ImageRUNNER 2800 - 100,000, ImageRUNNER 3300 - 120,000 Impressions Per Month
<i>Toner:</i>	Estimated Yield: 15,000 Images (at 6% Coverage)
<i>Dimensions (H x W x D):</i>	40-1/8" x 22-1/4" x 26-3/4" (1,020mm x 565mm x 678mm)
<i>Weight:</i>	176.3 lb. (80kg)
Duplexing Automatic Document Feeder-H1 (Optional)	
<i>Acceptable Originals:</i>	Statement-R to Ledger
<i>Capacity:</i>	50 Sheets (20 lb. Bond, Letter)
<i>Max. Paper Weight:</i>	10 lb. to 32 lb. Bond (Letter)
Cassette Feeding Unit-W1 (Optional)	
<i>Paper Capacity:</i>	2 x 500-sheet Paper Cassettes
<i>Paper Size</i>	
<i>Top Cassette:</i>	Statement-R to Legal
<i>Bottom Cassette:</i>	Statement-R to Ledger

<i>Paper Weights:</i>	17 lb. to 20 lb. Bond
Envelope Feeder Attachment-B1 (Optional)	
<i>Envelope Size:</i>	COM10, DL, Monarch, ISO-B5, ISO-C5, Yougata-4
<i>Feeder Capacity:</i>	Approx. 50 Envelopes or 1-1/4" (31.75mm)
Paper Deck-L1 (Optional)	
<i>Paper Capacity:</i>	2,500 Sheets (20 lb. Bond)
<i>Paper Size:</i>	Letter
<i>Paper Weights:</i>	17 lb. to 20 lb. Bond
Finisher-J1 (Optional)	
<i>Number of Trays:</i>	One Tray
<i>Tray Capacity:</i>	300 Sheets (Letter)
<i>Staple Position/Capacity:</i>	Top Corner (30 Sheets)
Saddle Finisher-G1 (Optional)	
<i>Number of Trays:</i>	Four trays, including Saddle-stitch Tray and Inner 2-Way Tray
<i>Tray Capacity</i>	
<i>Top Tray:</i>	1,000 Sheets (Letter)
<i>Inner 2-Way Tray:</i>	100 Sheets (Letter) 250 Sheets (Letter)
<i>Saddle-Stitch Tray:</i>	500 Sheets
<i>Staple Position:</i>	Multiposition Stapling (1) Top Corner, (2) Side Margin, (3) Saddle-stitch
<i>Stapling Capacity:</i>	50 Sheets (Letter) 10 Sheets Saddle-stitched (Letter, Ledger)
Saddle-stitch Specifications	
<i>Total Sides Imaged:</i>	40 (10 Sheets)
<i>Total Sets:</i>	1 to 5 Sheets/20 Saddle-stitched Sets 6 to 10 Sheets/10 Saddle-stitched Sets
<i>Folding:</i>	V-folding Standard
<i>Attachable Accessories:</i>	Puncher Unit-K1
Puncher Unit-K1 (Option for Saddle Finisher-G1)	
<i>Punch Method:</i>	Sequential Processing System
<i>Punch Types:</i>	2-hole/3-hole (Auto Change)
<i>Paper Sizes:</i>	2-hole (Letter-R, Legal) 3-hole (Letter, Ledger)
<i>Punch Dust Stock:</i>	Approx. 3,000 Sheets
Super G3 Fax Board-J1 (Optional)	
<i>Applicable Line:</i>	Public Switched Telephone Network (PSTN)
<i>Connection Lines:</i>	One (J1)
<i>Transmission Time**:</i>	ECM-MMR Approx. 3 Seconds per Page (33,600 bps)
<i>Compression System:</i>	MMR, MR, MH, JBIG
<i>Sending Sizes:</i>	Statement to Ledger
<i>Auto Dial Function:</i>	Address Book: 200 Destinations
<i>Image Memory:</i>	Approx. 3,700 Pages

Network Multi-PDL Printer Kit-C1 (Optional)

<i>Type:</i>	Embedded Print/Network
<i>Processor:</i>	Canon Custom Processor 250 MHz - Shared
<i>RAM:</i>	128MB (Std./Max.) - Shared
<i>Hard Disk:</i>	5.1GB - Shared
<i>PDL Support:</i>	PCL 5e, PCL 6, PostScript 3 Emulation
<i>Internal Fonts:</i>	136 PostScript Fonts, 117 Adobe Type Fonts, 19 TrueType Fonts, 80 PCL Roman Fonts, 32 PCL Bar-code Fonts
<i>Interface Connections:</i>	RJ-45 (10/100Base-T) IEEE 1284 (Compatibility: Nibble, Byte and ECP mode) Token Ring (Optional Card)
<i>Protocol Stacks:</i>	IPX/SPX: 802.2, 802.3, Ethernet II, 802.2 SNAP, TCP/IP, SMB AppleTalk: 802.2 SNAP and AppleTalk Phase II Only
<i>Network OS:</i>	Novell NetWare V.3.2, 4.1, 4.11, 4.2, 5 (IPX/SPX), Windows 95/98/Me (TCP/IP), Windows NT 4.0 (TCP/IP), Windows 2000 (TCP/IP), Solaris 1.X, 2.5 or later (TCP/IP), Apple System 7.5 or higher (DDP)

** Approximate 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (MMR, Standard Mode) at 33.6 Kbps modem speed when transmitting to another V.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

Specifications subject to change without notice.